


PCB

*PCB $\phi 3.175 \times 38.5\text{mm}$;

精磨短棒h6带倒角

Milling cutting blanks ISO h6, chamfered one end

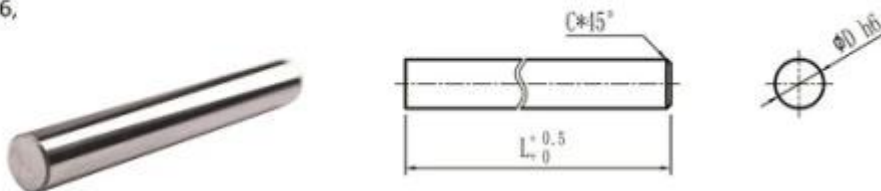

| 规格/Type | 尺寸/Dimension | | |
|--------------------------|---------------------|-------|-------|
| | 直径 | 长度 | 倒角 |
| | $\phi D(\text{mm})$ | L(mm) | C(mm) |
| $\phi 3.175 \times 38.5$ | 3.175 | 38.5 | 0.3 |

PCB

| 材质名称 (Grade) | WC (%) | CO (%) | 晶粒度 Grain size (μm) | 比重 Density (g/cm^3) ± 0.1 | 硬度 Hardness (HRA) ± 0.5 | 断裂韧性 KIC ($\text{MNm}^{-3/2}$) | 抗折力 TRS (kgf/mm^2) |
|-----------------|-----------|-----------|--|---|-----------------------------------|--|--|
| H09U | 91 | 9 | 0.3 | 14.5 | 93.7 | 9.2 | >350 |
| H12U-T | 88 | 12 | 0.3 | 14.2 | 93.0 | 9.6 | >350 |
| H06U-T | 94 | 6 | 0.4 | 14.9 | 94.5 | 8.4 | >380 |
| H06U | 94 | 6 | 0.4 | 14.9 | 94.0 | 8.7 | >380 |
| H08U-K | 92 | 8 | 0.4 | 14.7 | 93.2 | 9.0 | >380 |