


Wolframkarbid-PCB-Stab, der hauptsächlich auf Leiterplatten verwendet wird, hat ungeschliffene und feine Schleifoptionen.

※ Wolframkarbid-PCB-Stab, übliche Größe $\phi 3,175 \times 38,5$ mm;

精磨短棒h6带倒角

Milling cutting blanks ISO h6,
chamfered one end

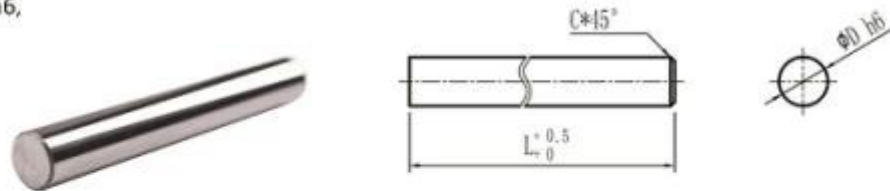

规格/Type	尺寸/Dimension		
	直径	长度	倒角
	ØD(mm)	L(mm)	C(mm)
Ø 3.175*38.5	3.175	38.5	0.3

Klasse zum PCB Stange

材质名称 (Grade)	WC (%)	CO (%)	晶粒度 Grain size (μm)	比重 Density (g/cm^3) ± 0.1	硬度 Hardness (HRA) ± 0.5	断裂韧性 KIC ($\text{MNm}^{-3/2}$)	抗折力 TRS (kgf/mm^2)
H09U	91	9	0.3	14.5	93.7	9.2	>350
H12U-T	88	12	0.3	14.2	93.0	9.6	>350
H06U-T	94	6	0.4	14.9	94.5	8.4	>380
H06U	94	6	0.4	14.9	94.0	8.7	>380
H08U-K	92	8	0.4	14.7	93.2	9.0	>380