


此類零件 ISO h6, 零件圖標註為 \varnothing h6, 零件圖標註為 \varnothing h6, 零件圖標註為 \varnothing h6.

* 零件圖標註為 \varnothing 3mm-25mm, 零件圖標註為 45mm, 50mm, 60mm, 70mm, 75mm, 80mm, 90mm, 100mm, 125mm, 140mm, 180mm

精磨短棒h6帶倒角

Milling cutting blanks ISO h6, chamfered one end

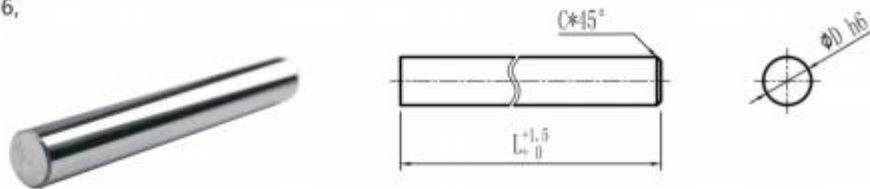

规格/Type	尺寸/Dimension		
	直径 $\varnothing D$ (mm)	长度 L(mm)	倒角 C(mm)
$\varnothing 3 \times 50$	3.0	50	0.4
$\varnothing 3 \times 100$	3.0	100	0.4
$\varnothing 3 \times 150$	3.0	150	0.4
$\varnothing 4 \times 45$	4.0	45	0.4
$\varnothing 4 \times 50$	4.0	50	0.4
$\varnothing 4 \times 150$	4.0	150	0.4
$\varnothing 5 \times 50$	5.0	50	0.5
$\varnothing 5 \times 100$	5.0	100	0.5
$\varnothing 5 \times 150$	5.0	150	0.5
$\varnothing 6 \times 50$	6.0	50	0.5
$\varnothing 6 \times 60$	6.0	60	0.5
$\varnothing 6 \times 70$	6.0	70	0.5
$\varnothing 7 \times 45$	7.0	45	0.6
$\varnothing 7 \times 60$	7.0	60	0.6
$\varnothing 8 \times 45$	8.0	45	0.6
$\varnothing 8 \times 60$	8.0	60	0.6
$\varnothing 8 \times 70$	8.0	70	0.6
$\varnothing 8 \times 100$	8.0	100	0.6
$\varnothing 10 \times 70$	10.0	70	0.6
$\varnothing 10 \times 80$	10.0	80	0.6
$\varnothing 10 \times 90$	10.0	90	0.6
$\varnothing 10 \times 100$	10.0	100	0.6
$\varnothing 12 \times 75$	12.0	75	0.8
$\varnothing 12 \times 90$	12.0	90	0.8
$\varnothing 12 \times 100$	12.0	100	0.8
$\varnothing 14 \times 75$	14.0	75	0.8
$\varnothing 16 \times 100$	16.0	100	0.8
$\varnothing 16 \times 125$	16.0	125	0.8
$\varnothing 25 \times 100$	25.0	100	1.0
$\varnothing 25 \times 140$	25.0	140	1.0
$\varnothing 25 \times 180$	25.0	180	1.0

□□ □□:

材质名称 (Grade)	WC (%)	CO (%)	晶粒度 Grain size (μm)	比重 Density (g/cm^3) ± 0.1	硬度 Hardness (HRA) ± 0.5	断裂韧性 KIC ($\text{MNm}^{-3/2}$)	抗折力 TRS (kgf/mm^2)
H09U	91	9	0.3	14.5	93.7	9.2	>350
H12U-T	88	12	0.3	14.2	93.0	9.6	>350
H06U-T	94	6	0.4	14.9	94.5	8.4	>380
H06U	94	6	0.4	14.9	94.0	8.7	>380
H08U	92	8	0.4	14.7	93.6	8.8	>380
H08U-K	92	8	0.4	14.7	93.2	9.0	>380
H12U	88	12	0.4	14.3	92.5	9.4	>350
H10S	90	10	0.6	14.4	92.1	9.9	>350
H10F	90	10	0.8	14.4	91.8	10.9	>350